
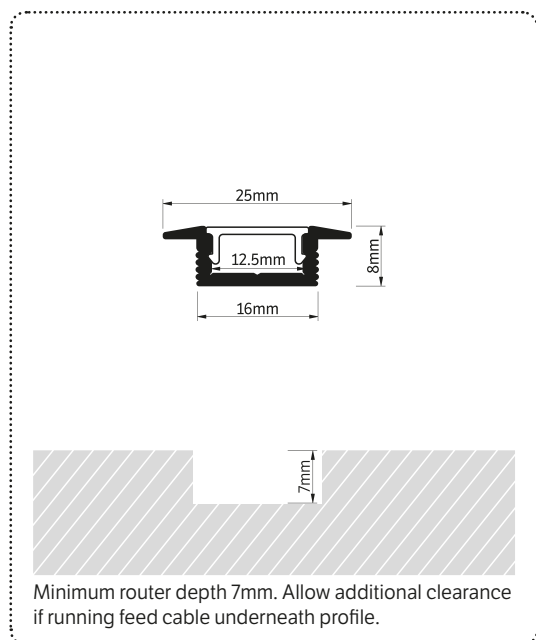


XR2508

Ultra Shallow Premium Recessed Only Aluminium Profile

The XR2508 Ultra Shallow is designed for recessed installation into materials with limited depth.

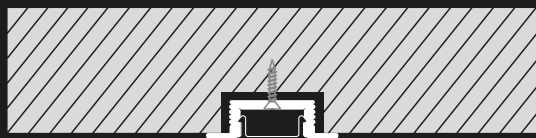

Minimum router depth 7mm. Allow additional clearance if running feed cable underneath profile.

XR2508 Premium extrusion comes complete with plastic end caps and an opal frosted diffuser.

Important: Due to the shallow profile of the XR2508 a small amount of spotting is visible when looking directly at the light source. Halcyon does not recommend this profile for line of sight installations (e.g. recessed into ceilings or walls). Use XR2513 for line of sight installations.

PROFILE CODE

DESCRIPTION	CODE
Silver Ultra Shallow Premium Recessed with Opal Frosted diffuser custom length	XR2508 S
Silver Ultra Shallow Premium Recessed with Opal Frosted diffuser 2.5m kit with end caps	XR2508 SK

ACCESSORIES

DESCRIPTION	CODE
Silver End Cap Blank	XR2508 ECBS
Silver End Cap Feed	XR2508 ECFS